

BLOW, WATER, VACUUM GUNS & ACCESSORIES







HOSE REELS, BLOW & WATER GUNS

Blow & water guns effectively clean surfaces with air or water with powerful blowing force. They feature a wide variety of tips for different cleaning methods. Hose reels are used to store hose. There are spring & manual rewind & are categorised by the diameter & length of hose they hold, the pressure rating & the rewind method.






Blow Guns





742 Vacuum Blow Guns & Accessories

HOSE REELS, BLOW & WATER GUNS

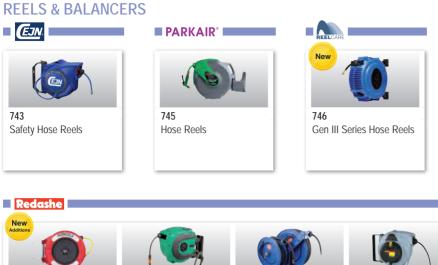

747 Retracta R3 Series Spring Rewind Hose Reels

748 **Reelworks Series** Spring Rewind

755

Tool Balancers

Hose Reels



751 **Coxreel Series** Spring Rewind Hose Reels



752 Spring Rewind Cable Reels

Siconat 🔤



AIR TECHNOLOGY





756 Energy Saving Air Technology

GARDEN EQUIPMENT







620

620

PRICE

£21.08

£22.15

PRICE

£42.23

CEJN Blow Guns – Series 208

208 Blow Gun Features

- Suspension possible by both the built-in hook and the handle
 The normal grip is adjusted to fit the hand during normal usage

- Infinitely variable airflow with high volume flow for efficient cleaning

208 Detect Blow Gun Additional Features

SPECIFICATIONS

| Airflow at inlet pressure of 6 bar (87 psi) | 500 l/m (18 CFM) |
|---|---|
| Max. working pressure | Standard blow guns: 16 bar (232 psi) 8 bar (116 psi) blow gun with regulator |
| Temperature range | -20°C to +60°C (-4°F to +140°F) |



APPLICABLE SAFETY STANDARDS

OK

The products with the 'OK' symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b)). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar).

The products with the 'ear' symbol are compliant with the International Standard ISO 4414 - Pneumatic Fluid Power & OSHA 1910.95 - Occupational Noise Exposure. These products have a sound level below 85 dBA & meet the EU Machine Directive §1.5.8. concerning noise reduction demands.

DESCRIPTION

Blow gun 90 mm, automatic shut-off

DESCRIPTION

Blow gun 90 mm, removable nozzle

BLOW GUNS – SERIES 208



DETECT BLOW GUN – SERIES 208



BLOW GUN DISPLAY CASE







CEJN Blow Guns – Series 209

209 Blow Gun Features

- Ergonomically designed for comfortable handling
 Suspension possible by both the built-in hook and the handle

- Extremely durable acetal plastic that also isolates against cold media Infinitely variable airflow with high volume flow for efficient cleaning

SPECIFICATIONS

| Airflow at inlet pressure of 6 bar (87 psi) | 500 l/m (18 CFM) |
|---|---|
| Max. working pressure | Standard blow guns: 16 bar (232 psi) 8 bar (116 psi) blow gun with regulator |
| Temperature range | -20°C to +60°C (-4°F to +140°F) |



APPLICABLE SAFETY STANDARDS

OK

The products with the 'OK' symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b)). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar).

The products with the 'ear' symbol are compliant with the International Standard ISO 4414 - Pneumatic Fluid Power & OSHA 1910.95 - Occupational Noise Exposure. These products have a sound level below 85 dBA & meet the EU Machine Directive §1.5.8. concerning noise reduction demands.

BLOW GUNS – SERIES 209



620

620

620

PRICE

£30.35

PRICE

£50.02

PRICE

£25.58



C112089971

BLOW GUN ACCESSORIES - SERIES 208 & 209



£17.95

| New SOFT BRUSH NO | DZZLE | 620 | New HARD BRUSH NOZZL | E | 620 |
|----------------------|-------------------|--------|-------------------------|-------------------|--------|
| PART NUMBER | DESCRIPTION | PRICE | PART NUMBER | DESCRIPTION | PRICE |
| C112089970 | Soft brush nozzle | £22.72 | C112089972 | Hard brush nozzle | £22.72 |
| New MEDIUM BRUSH | | 620 | New FLAT NOZZLE | | 620 |
| PART NUMBER | DESCRIPTION | PRICE | PART NUMBER | DESCRIPTION | PRICE |

C112089975

£22.72

| OK AIR CURTAIN NO | ZZLE | 620 |
|----------------------|--------------------|--------|
| PART NUMBER | DESCRIPTION | PRICE |
| C112089954 | Air curtain nozzle | £12.41 |
| | | |

Medium brush nozzle

| OK SILENCER | | 620 |
|----------------|-------------|--------|
| PART NUMBER | DESCRIPTION | PRICE |
| C112089962 | Silencer | £11.30 |
| | | |

Flat nozzle

| <mark>OK</mark> BYPASS NOZZLE | | 620 |
|----------------------------------|---------------|-------|
| PART NUMBER | DESCRIPTION | PRICE |
| C112089961 | Bypass nozzle | £7.56 |
| | | |

| | | 620 |
|-------------|----------------|-------|
| PART NUMBER | DESCRIPTION | PRICE |
| C112089963 | Venturi nozzle | £9.39 |
| | | |







SAFETY

| PART NUMBER | |
|-------------|-----|
| C112089955 | Tra |

anslucent shield diameter 100 mm



Did you know?

Products with safety benefits are indicated by a chevron at the bottom of their table



BLOW GUN ACCESSORIES - SERIES 208 & 209



| 90 MM TUBE | | 620 |
|-------------|-------------|-------|
| PART NUMBER | DESCRIPTION | PRICE |
| C112080215 | 90 mm tube | £6.07 |
| | | |

| ОК | | |
|--------------------------|----------------------|--------|
| 90 MM TUBE REGULATOR 620 | | |
| PART NUMBER | DESCRIPTION | PRICE |
| C112080216 | 90 mm tube regulator | £28.29 |

| 2 400 MM FLEXIBL | E TUBE | 620 |
|---------------------|----------------------|--------|
| PART NUMBER | DESCRIPTION | PRICE |
| C112080222 | 400 mm flexible tube | £22.72 |

| EXTENSION TUB | E | 620 |
|---------------|-------------|--------|
| PART NUMBER | DESCRIPTION | PRICE |
| C112080219 | 300 mm tube | £18.37 |
| C112080220 | 500 mm tube | £18.75 |

| 90 MM STAR-TIP | | |
|-----------------------|---------------------|-------|
| PART NUMBER | DESCRIPTION | PRICE |
| C112083215 | 90 mm Star-tip tube | £9.20 |
| | | |

| 2 STAR-TIP EXTENSION TUBE | | | | | |
|-------------------------------------|----|--|--|--|--|
| DESCRIPTION | PF | | | | |
| | | | | | |

| PART NUMBER | DESCRIPTION | PRICE |
|-------------|----------------------|--------|
| C112083219 | 300 mm Star-tip tube | £25.70 |
| C112083220 | 500 mm Star-tip tube | £26.08 |
| | | |

| OK SILENCER | | 620 |
|----------------|-----------------|-------|
| PART NUMBER | DESCRIPTION | PRICE |
| C112089965 | Silencer nozzle | £2.75 |

| PART NUMBER C112109000 DESCRIPTION PRICE & 23.02 | MAGNETIC ACCESSORY KIT 620 | | | | |
|--|----------------------------|---|--------|--|--|
| | MAGNETIC ACCESSORT RIT 620 | | | | |
| C112109000 Magnet, screw, bolt & 2 x fixing plates £23.02 | PART NUMBER | DESCRIPTION | PRICE | | |
| | C112109000 | Magnet, screw, bolt & 2 x fixing plates | £23.02 | | |







CEJN MultiFlow Air & Fluid Blow Guns

Description

CEJN's new MultiFlow blow gun effectively cleans surfaces with air or water with unparallelled blowing force. Precise flow is achieved by adjustable flow settings. Nozzle adjusts from narrow jet to wide beam. The MultiFlow meets and exceeds OSHA safety standards when dead-ended.

Features / Benefits

- Unmatched blowing force
- Adjustable flow control
- Adjustable beam

| SPECIFICATIONS | |
|--------------------------|---|
| Air flow | 200 - 1200 l/min (7 - 42 CFM) |
| Fluid flow | 5 – 25 l/min (1.1 – 5.5 GPM UK) |
| Air sound level | 79 – 101 dBA |
| Max working pressure | 16 bar (232 psi) |
| Min burst pressure | 64 bar (928 psi) |
| Temperature range 16 bar | -20°C to +60°C (-4°F to +140°F) |
| Temperature range 10 bar | -20°C to +80°C (-4°F to +176°F) |
| Media | Air & non-explosive water based liquids |
| MATERIALS | |
| Body | POM, TPE, aluminium |
| Seal | NBR |
| | |



APPLICABLE SAFETY STANDARDS



The products with the 'OK' symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b)). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar).

The products with the 'ear' symbol are compliant with the International Standard ISO 4414 – Pneumatic Fluid Power & OSHA 1910.95 – Occupational Noise Exposure. These products have a sound level below 85 dBA & meet the EU Machine Directive §1.5.8. concerning noise reduction demands.

MULTIFLOW BLOW GUNS









MULTIFLOW AIR & FLUID BLOW GUNS & ACCESSORIES





620

620

PRICE

£20.47

| MULTIFLOW BLC ACCESSORIES STAR-TIP TUBE N | |
|---|-------------|
| | DESCRIPTION |

| PART NUMBER | DESCRIPTION | PRICE |
|-------------|-----------------|--------|
| C112100230 | Star-tip nozzle | £24.40 |
| | | |

MULTIFLOW BLOW GUN ACCESSORIES STRAIGHT TUBE NOZZLE

PART NUMBER C112100220 DESCRIPTION Straight tube nozzle

| MULTIFLOW BLO ACCESSORIES ADJUSTABLE FL | 620 | |
|---|--------------|--------|
| PART NUMBER | DESCRIPTION | PRICE |
| C112100210 | Fluid nozzle | £39.40 |
| | | |

| MULTIFLOW BLOW GUN ACCESSORIES ADJUSTABLE JET NOZZLE | | | 62 | |
|--|-------------|-------------|------|----|
| | PART NUMBER | DESCRIPTION | PRIC | CE |
| | C112100200 | Jet nozzle | £17. | 45 |





DESCRIPTION

The Typhoon is Coilhose's most powerful standard blow gun, delivering up to 34 CFM (2500 series), 51 CFM (3800 series) & over three pounds of thrust at 125 psi. The Typhoon is ideal for heavy duty clean-up & blow-off, & its lightweight & sleek design make this gun a favourite.

FEATURES / BENEFITS

- · Delivers up to 51 CFM
- · Lightweight & ergonomic
- · Variable flow trigger for control
- · Maximum flow for easy clean-up & blow-off
- · Integral hanging hook

| Wide variety of tips & e | xtensions available | |
|--|---------------------|-------------|
| SPECIFICATIONS | 2500 Series | 3800 Series |
| Sound level @ 125 psi | 85 dB | 80 dB |
| Flow rate @ 125 psi | 34 CFM | 51 CFM |
| Thrust | 2.1 lb | 3.1 lb |

1/2-27 UNF 2A



1/2-27 UNF 2A

| 0 | <mark>)</mark> K | 2 | | |
|-----|------------------|-----|--------|--|
| _ | | SER | | |
| - 4 | /// 7 | | I INTE | |

Nozzle Thread

| 1/4" BSPP INLET | वा | 2020 |
|-----------------|--|--------|
| PART NUMBER | DESCRIPTION | PRICE |
| CO-TYP2502 | High flow tip blow gun | £35.35 |
| CO-TYP2506 | 6" extension & high flow tip blow gun | £44.18 |
| CO-TYP2512 | 12" extension & high flow tip blow gun | £47.19 |
| CO-TYP2518 | 18" extension & high flow tip blow gun | £49.36 |
| CO-TYP2524 | 24" extension & high flow tip blow gun | £50.60 |
| CO-TYP2536 | 36" extension & high flow tip blow gun | £57.94 |
| CO-TYP2548 | 48" extension & high flow tip blow gun | £67.32 |
| CO-TYP2560 | 60" extension & high flow tip blow gun | £70.69 |
| CO-TYP2572 | 72" extension & high flow tip blow gun | £74.66 |
| | | |

APPLICABLE SAFETY STANDARDS



The products with the 'OK' symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b)). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar).

The products with the 'EAR' symbol are compliant with the OSHA 1910.95 - Occupational Noise Exposure. These products have a sound level below 85 dBA.



| PART NUMBER | DESCRIPTION | PRICE |
|-------------|----------------------------|--------|
| CO-TYP3802 | Multi-jet tip blow gun kit | £73.73 |
| | | |





OK

| PART NUMBER | DESCRIPTION | PRICE |
|-------------|--|---------|
| CO-TYP3806 | 6" extension & multi-jet tip blow gun | £79.83 |
| CO-TYP3812 | 12" extension & multi-jet tip blow gun | £83.44 |
| CO-TYP3818 | 18" extension & multi-jet tip blow gun | £85.92 |
| CO-TYP3824 | 24" extension & multi-jet tip blow gun | £86.82 |
| CO-TYP3836 | 36" extension & multi-jet tip blow gun | £101.14 |
| CO-TYP3848 | 48" extension & multi-jet tip blow gun | £98.62 |
| CO-TYP3860 | 60" extension & multi-jet tip blow gun | £103.25 |
| CO-TYP3872 | 72" extension & multi-jet tip blow gun | £107.51 |



Products with safety benefits are indicated by a chevron at the bottom of their table

Did you know?



PAR

co

co co

TYPHOON BLOW GUN ACCESSORIES & TYPHOON PLUS HIGH VOLUME BLOW GUNS

2020

2020

F



| HIGH FLOW | I TIPS |
|------------------|-----------------|
| 1/2" - 27 UI | IS THREA |

| - 27 UNS TH | HREAD OUTLET | 2020 |
|-------------|---------------------------------------|--------|
| T NUMBER | DESCRIPTION | PRICE |
| -HFN-00M | With male pipe thread | £10.21 |
| -HFN-11M | Chrome plated - with male pipe thread | £17.22 |
| -HFN-00F | With female pipe thread | £7.90 |
| | | |

EXTENSION HIGH FLOW TIPS 1/2" – 27 UNS THREAD OUTLET

| 1/2 21 0110 11 | | 2020 |
|----------------|--------|--------|
| PART NUMBER | LENGTH | PRICE |
| CO-EXT06CN | 6" | £19.94 |
| CO-EXT12CN | 12" | £22.63 |
| CO-EXT18CN | 18" | £25.28 |
| CO-EXT24CN | 24" | £26.80 |
| CO-EXT36CN | 36" | £31.68 |
| CO-EXT48CN | 48" | £37.53 |
| CO-EXT60CN | 60" | £42.65 |
| CO-EXT72CN | 72" | £47.62 |
| | | |

MULTI-JET TIPS 2020 1/2" - 27 UNS THREAD OUTLET 2020 PART NUMBER DESCRIPTION PRICE CO-MJN-O Multi-jet tip £33.45



EXTENSION MULTI-JET TIPS 1/2" – 27 UNS THREAD OUTL

| 2" – 27 UNS THREAD OUTLET 2020 | | |
|---------------------------------------|--------|--------|
| PART NUMBER | LENGTH | PRICE |
| CO-EXT06MJ | 6" | £50.09 |
| CO-EXT12MJ | 12" | £52.00 |
| CO-EXT18MJ | 18" | £53.90 |
| CO-EXT24MJ | 24" | £56.34 |
| CO-EXT36MJ | 36" | £63.12 |
| CO-EXT48MJ | 48" | £69.19 |
| CO-EXT60MJ | 60" | £74.41 |

72"

EXTENSIONS

1/2" – 27 UNS THREAD OUTLET

| PART NUMBER | LENGTH | PRICE |
|-------------|--------|--------|
| CO-EXT-2DL | 2" | £6.61 |
| CO-EXT-6 | 6" | £10.82 |
| CO-EXT-12 | 12" | £15.17 |
| CO-EXT-18 | 18" | £17.27 |
| CO-EXT-24 | 24" | £19.23 |
| CO-EXT-36 | 36" | £24.03 |
| CO-EXT-48 | 48" | £31.03 |
| CO-EXT-60 | 60" | £36.97 |
| CO-EXT-72 | 72" | £40.82 |
| | | |

EXTENSION COUPLING 1/2" – 27 UNS THREAD OUTLET

CO-EXT72MJ



£79.25

| PART NUMBER | LENGTH | PRICE |
|-------------|--------|-------|
| CO-EXT-1 | 1" | £7.27 |



TYPHOON PLUS BLOW GUN

FEATURES / BENEFITS

- The Typhoon® Plus delivers maximum power with precise flow control
- Durable & ergonomic high performance blow gun with built-in flow control
 Non-marking material perfect for working near delicate or polished surfaces
- Tough construction suitable for use in harsh environments

SPECIFICATIONS

| Max. operating pressure | 10 bar (145 psi) |
|---------------------------|--------------------------------------|
| Max. operating temperaure | 60°C (150°F) |
| Nozzle thread | 1/2 – 27 UNF 2A |
| Air consumption | 765 l/min @ 7 bar (27 CFM @ 100 psi) |
| Noise level | 82 dBA @ 7 bar (100 psi) |
| MATERIALS | |
| Body & trigger | POM-C |
| Inlet adaptor | Aluminium |

APPLICABLE SAFETY STANDARDS



The products with the 'OK' symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b)). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar). The products with the 'EAR' symbol are compliant with the

OSHA 1910.95 – Occupational Noise Exposure. These products have a sound level below 85 dBA.





733





HIGH VOLUME BLOW GUNS



2020

CANNON EXTREME HIGH VOLUME BLOW GUNS

FEATURES / BENEFITS

Suitable for anyone with an ample air supply (tow-behind compressor for mobile applications or large capacity compressor found in plants) & has a need to move heavy / stubborn debris. Also suitable for drying or cleaning several small orifices or indentations rapidly. Geared for, but not limited to, indoor use.

Operation / performance: Air consumption equals 134 CFM at 100 psi.

MATERIAL S

Die cast aluminium, machined brass & stainless steel body

3/4" BSPP female thread port

Wear-points constructed of heat-treated & zinc plated steel tip



MULTI-JET NOZZLE BLOW GUN EXTENSION MODEL

| PART NUMBER | CONNECTION | PRICE |
|---------------|---------------------|---------|
| CO-9000-MJP | 2" extension model | £383.52 |
| CO-9000-24MJP | 24" extension model | £432.82 |
| CO-9000-48MJP | 48" extension model | £479.17 |



EXTENSION MODEL

| PART NUMBER | CONNECTION | PRICE |
|--------------|---------------------|---------|
| CO-9000-SP | 2" extension model | £397.75 |
| CO-9000-24SP | 24" extension model | £358.07 |
| CO-9000-48SP | 48" extension model | £366.37 |



CEG 1 BLOW GUN RANGE

DESCRIPTION

The CEG-1 is ergonomically designed to fit the natural contour of the user's hand, maximising comfort even during long term use. This gives the user a wider range of motion to direct the additional CEG-1 working capacity right where it's needed, resulting in increased blow-off efficiency.

FEATURES / BENEFITS

- . The curve of the heavy duty steel lever & soft vinyl grip allows the thumb
- to rest in a natural position, allowing maximum comfort
- · Full-size hanging hook makes the gun easy to store & use
- Unique thermoplastic wrap-around body cover maximises user comfort
- OSHA compliant
- Maximum inlet 150 psi

MATERIALS

- · Die cast zinc body
- 1/4" BSPP female thread port
- · Aluminium with black anodised sleeve tip
- · Nickel plated steel lever



| EXTENSION ONL | Y | 2020 |
|---------------|----------------|--------|
| PART NUMBER | EXTENSION SIZE | PRICE |
| CO-CEG-06-DPB | 6" Extension | £10.47 |
| CO-CEG-12-DPB | 12" Extension | £13.72 |
| CO-CEG-24-DPB | 24" Extension | £17.50 |
| CO-CEG-36-DPB | 36" Extension | £21.74 |

APPLICABLE SAFETY STANDARDS



OK

The products with the 'OK' symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b)). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar).



The products with the 'EAR' symbol are compliant with the OSHA 1910.95 - Occupational Noise Exposure. These products have a sound level below 85 dBA.

HIGH FLOW SAFETY BLOW GUNS COMPLETE WITH EXTENSION & SAFETY NOZZLE



| PART NUMBER | CONNECTION | EXTENSION SIZE | PRICE |
|------------------|------------|-------------------|--------|
| CO-CEG-06SHP-DPB | 1/4" BSPP | 6" | £40.66 |
| CO-CEG-12SHP-DPB | 1/4" BSPP | 12" | £44.46 |
| CO-CEG-24SHP-DPB | 1/4" BSPP | 24" | £48.35 |
| CO-CEG-36SHP-DPB | 1/4" BSPP | 36" | £52.62 |





STANDARD BLOW GUNS



STANDARD VOLUME BLOW GUNS

BUTTON BLOW GUN FEATURES / BENEFITS

- Compact design
- · Economical alternative to lever operated & pistol grip types
- Rugged construction withstands rough handling

IN-LINE BLOW GUN FEATURES / BENEFITS

- Compact & durable with maximum flow
 Ideal for at-the-tool use
- Chrome plated zinc body

APPLICABLE SAFETY STANDARDS

The products with the 'OK' symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b)). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar).

2

The products with the 'EAR' symbol are compliant with the OSHA 1910.95 – Occupational Noise Exposure. These products have a sound level below 85 dBA.



| PART NUMBER | DESCRIPTION | PRICE |
|-------------|---------------------|--------|
| CO-661 | Rubber tip blow gun | £22.30 |
| | | |





| OK 7 | JN | 2020 |
|-------------|----------------------------------|--------|
| PART NUMBER | DESCRIPTION | PRICE |
| CO-640S | In-line blow gun with safety tip | £16.76 |







600 SERIES METAL BLOW GUNS



FEATURES / BENEFITS

- Durable zinc, die cast body
- · Ergonomic design & large operating lever to reduce fatigue & discomfort
- · Chrome plated finish for superior corrosion resistance

SPECIFICATIONS

Pressure rating Temperature range 10 bar (150 psi) 0°C to 80°C (32°F to 180°F)

APPLICABLE SAFETY STANDARDS



The products with the 'OK' symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b)). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar).

The products with the 'EAR' symbol are compliant with the OSHA 1910.95 - Occupational Noise Exposure. These products have a sound level below 85 dBA.



1/4" BSPT INLET / 1/8" NPSM OUTLET

| 1/4" BSPT INLET / 1/8" NPSM OUTLET 2020 | | |
|--|--------------------------|--------|
| PART NUMBER | DESCRIPTION | PRICE |
| CO-603S | 3" safety extension gun | £30.36 |
| CO-606S | 6" safety extension gun | £32.81 |
| CO-608S | 8" safety extension gun | £34.16 |
| CO-610S | 10" safety extension gun | £36.92 |
| CO-612S | 12" safety extension gun | £39.37 |
| CO-616S | 16" safety extension gun | £44.97 |
| CO-618S | 18" safety extension gun | £47.76 |
| CO-624S | 24" safety extension gun | £59.38 |
| CO-630S | 30" safety extension gun | £67.77 |
| CO-636S | 36" safety extension gun | £75.39 |



SAFETY BLOW GUN 1/4" BSPT INI FT / 1/8" NPSM OUTL FT

| 1/4 BSFTINLET/ 1/6 NFSWIOUTLET | | 2020 |
|--------------------------------|-----------------------------------|--------|
| PART NUMBER | DESCRIPTION | PRICE |
| CO-600FF06 | 6" flexible safety extension gun | £41.28 |
| CO-600FF12 | 12" flexible safety extension gun | £42.33 |
| | | |













OK

SAFETY SHIELD

PART NUMBER

CO-ST12

1/8" NPSM

ОК



SAFETY TIPS FOR USE WITH CO-600NT1W

| OK 7 SAFETY STANDAR 1/8" NPSM | D | 2020 |
|-------------------------------------|---------------------|-------|
| PART NUMBER | DESCRIPTION | PRICE |
| CO-ST10 | Safety standard tip | £5.47 |





| | - 00 |
|------|------|
| | CO- |
| | CO- |
| | CO- |
| | CO- |
| 2020 | CO- |

| 1/8 | "NPSM | | 2020 |
|-----|-------------|--------------------|--------|
| F | PART NUMBER | DESCRIPTION | PRICE |
| | CO-ST11 | Safety booster tip | £10.03 |
| | | | |

DESCRIPTION

Safety shield



STRAIGHT SAFETY EXTENSION 1/8" NPSM

| /8" NPSM | | 2020 |
|-------------|-------------------------------|--------|
| PART NUMBER | DESCRIPTION | PRICE |
| CO-ST203 | 3" straight safety extension | £11.94 |
| CO-ST206 | 6" straight safety extension | £14.91 |
| CO-ST208 | 8" straight safety extension | £15.98 |
| CO-ST210 | 10" straight safety extension | £18.12 |
| CO-ST212 | 12" straight safety extension | £20.84 |
| CO-ST216 | 16" straight safety extension | £26.62 |
| CO-ST218 | 18" straight safety extension | £29.13 |
| CO-ST224 | 24" straight safety extension | £39.01 |
| CO-ST236 | 36" straight safety extension | £59.55 |
| | | |



1/8" NPSM

2020

PRICE

£14.52

| 1/8" NPSM | | 2020 |
|-------------|-------------------------------|--------|
| PART NUMBER | DESCRIPTION | PRICE |
| CO-STFF06 | 6" flexible safety extension | £25.89 |
| CO-STFF12 | 12" flexible safety extension | £28.79 |
| | | |



Products with safety benefits are indicated by a chevron at the bottom of their table

NEEDLE TIPS

| NEEDLE TIPS 1/8" NPSM | | 2020 |
|--------------------------|------------------|-------|
| PART NUMBER | SIZE | PRICE |
| CO-SNT1 | 0.042 x 15/16" | £8.04 |
| CO-SNT2 | 0.050 x 1 3/16" | £8.04 |
| CO-SNT3 | 0.072 x 1 3/4" | £8.04 |
| CO-SNT4 | 0.095 x 2 15/32" | £8.04 |
| CO-SNT5 | 0.134 x 2 3/4" | £8.04 |
| | | |





600 SERIES METAL BLOW GUNS



2020

2020

FEATURES / BENEFITS

- Durable zinc, die cast body
- Ergonomic design & large operating lever to reduce fatigue & discomfort
- Chrome plated finish for superior corrosion resistance



STANDARD BLOW GUN

| 1/4" BSPT INLET / 1/8" NPSM OUTLET | | | | | |
|--|-------------|--------|--|--|--|
| PART NUMBER | DESCRIPTION | PRICE | | | |
| CO-600NT1W | Basic gun | £15.70 | | | |
| Meets OSHA requirements when used with safety tips | | | | | |



STANDARD BLOW GUN

| 1/4" BSPT INLET / RUBBER TIP 202 | | | | |
|----------------------------------|----------------|--------|--|--|
| PART NUMBER | PRICE | | | |
| CO-601 | Rubber tip gun | £19.76 | | |

SPECIFICATIONS

Pressure rating Temperature range 10 bar (150 psi) 0°C to 80°C (32°F to 180°F)



STANDARD BLOW GUN

1/4" BSPT INLET / SIPHON TIP

| PART NUMBER | DESCRIPTION | PRICE |
|-------------|----------------|--------|
| CO-602 | Siphon tip gun | £43.59 |



STANDARD BLOW GUN 1/4" BSPT INLET / BRUSH TIP

| 1/4 DOFTINLET | 2020 | |
|---------------|----------------------|--------|
| PART NUMBER | DESCRIPTION | PRICE |
| CO-801 | Steel brush gun | £50.73 |
| CO-802 | Nylon brush gun | £44.00 |
| CO-803 | Horse hair brush gun | £44.00 |

REPLACEMENT TIPS

| RUBBER TIP | | 2020 |
|-------------------------|--------------|--------|
| PART NUMBER | SIZE | PRICE |
| CO-SAT13 | 1/8" NPSM | £8.13 |
| BRASS TIP | | 2020 |
| PART NUMBER | SIZE | PRICE |
| CO-SAT15 | 1/8" NPSM | £3.25 |
| FLEXIBLE NYLON SHAFT | Contra la | 2020 |
| PART NUMBER | SIZE | PRICE |
| CO-FLX7 | 1/8" NPSM | £46.46 |
| UU-I LAI | 170 INF OIVI | 240.40 |

| SIPHON TIP | | 2020 |
|-------------|-----------|--------|
| PART NUMBER | SIZE | PRICE |
| CO-SAT14 | 1/8" NPSM | £19.70 |

| PART NUMBER | DESCRIPTION | SIZE | PRICE | | | |
|-------------|-------------|-----------|--------|--|--|--|
| CO-811 | Steel brush | 1/8" NPSM | £43.37 | | | |
| CO-822 | Nylon brush | 1/8" NPSM | £26.55 | | | |
| | | | | | | |

| TELESCOPIC TIP | | | 2020 |
|----------------|-----------|----------|--------|
| PART NUMBER | SIZE | LENGTH | PRICE |
| CO-STT32 | 1/8" NPSM | 8" – 36" | £53.64 |



WATER GUNS & BLOW GUNS

PARKAIR®



BLOW GUNS

| SPECIFICATIONS | |
|-------------------|--|
| Suitability | Air (no other type of gas or liquid) Do not use in water applications |
| Temperature range | 0°C to 60°C (32°F to 140°F) |
| Working pressure | 0 to 150 psi |





BLOW GUNS





| SAFETY BLOW GUN WITH PLASTIC NOZZLE BRASS 1/4" BSPP FEMALE INLET 5420 | | | | |
|---|----------------|--------------|--------|-------|
| PART NUMBER | NOISE LEVEL | FLOW RATE | WEIGHT | PRICE |
| rP200300002 | 79 dBA | 230 l/min | 105 g | £8.95 |



SILENCED BLOW GUN WITH 100 MM STEEL NOZZLE BRASS 1/4" BSPP FEMALE INLET

| PART NUMBER | NOISE LEVEL | FLOW RATE | WEIGHT | PRICE |
|-------------|----------------|--------------|--------|-------|
| rP100101000 | 76 dBA | 230 l/min | 120 g | £9.61 |

| SILENCED SAFETY BLOW GUN WITH PLASTIC NOZZLE BRASS 1/4" BSPP FEMALE INLET 5420 | | | | |
|--|----------------|--------------|--------|--------|
| PART NUMBER | NOISE LEVEL | FLOW RATE | WEIGHT | PRICE |
| rP200301000 | 73 dBA | 205 l/min | 105 g | £10.33 |



STANDARD BLOW GUN WITH PLASTIC NOZZLE BRASS 1/4" BSPP FEMALE INLET

| PART NUMBER | NOISE LEVEL | FLOW RATE | WEIGHT | PRICE |
|-------------|----------------|--------------|--------|-------|
| rP200100000 | 78 dBA | 240 l/min | 105 g | £8.23 |









SAFETY



Did you know?

Products with safety benefits are indicated by a chevron at the bottom of their table



BLOW GUNS





| Group II category 2G SAFETY BLOW G WITH PLASTIC N ATEX APPROVED BRASS 1/4" BSPI | UN OZZLE | INLET | | 5420 |
|--|----------------|--------------|--------|--------|
| PART NUMBER | NOISE LEVEL | FLOW RATE | WEIGHT | PRICE |
| rP300200300 | 79 dBA | 230 l/min | 105 g | £13.40 |

| SILENCED SAFE PRESSURE BLOV WITH PLASTIC N BRASS 1/4" BSPI | V GUN OZZLE | | 5420 |
|---|----------------|--------|--------|
| PART NUMBER | FLOW RATE | WEIGHT | PRICE |
| rP203301000 | 125 l/min | 110 g | £12.35 |
| | | | |

| Group II category 2G SILENCED SAFE WITH PLASTIC N ATEX APPROVEL BRASS 1/4" BSP | TY BLOW O OZZLE | | | 5420 |
|---|--------------------|--------------|--------|--------|
| | | | | |
| PART NUMBER | NOISE LEVEL | FLOW RATE | WEIGHT | PRICE |
| rP300200301 | 73 dBA | 205 l/min | 105 g | £15.49 |



| STANDARD COM GUN WITH PLAS BRASS 1/4" BSPI | TIC NOZZLE | | | 5420 |
|--|------------|------|--------|-------|
| PART NUMBER | NOISE | FLOW | WFIGHT | PRICE |

| PART NUMBER | NOISE LEVEL | FLOW RATE | WEIGHT | PRICE |
|-------------|----------------|--------------|--------|-------|
| rP400100000 | - | 345 l/min | 40 g | £7.19 |

| Group II category 2G STANDARD BLOV WITH PLASTIC N ATEX APPROVED BRASS 1/4" BSP | N GUN OZZLE | INLET | 1 | 5420 |
|---|----------------|--------------|--------|--------|
| PART NUMBER | NOISE LEVEL | FLOW RATE | WEIGHT | PRICE |
| rP300200100 | 78 dBA | 240 l/min | 105 g | £12.35 |

| COMPACT BLOW FLOW RATE MUL PLASTIC NOZZLI | C | 75 | | | |
|---|----------------|--------------|--------|-------|--|
| BRASS 1/4" BSPP FEMALE INLET 5420 | | | | | |
| PART NUMBER | NOISE LEVEL | FLOW RATE | WEIGHT | PRICE | |

440 l/min

-

rP400400000

42 g

£8.23

| Group II category 2G SILENCED BLOW WITH PLASTIC N ATEX APPROVED BRASS 1/4" BSP | GUN OZZLE | INLET | | 5420 |
|---|----------------|--------------|--------|--------|
| PART NUMBER | NOISE LEVEL | FLOW RATE | WEIGHT | PRICE |
| rP300200200 | 72 dBA | 205 l/min | 105 g | £13.40 |

| SAFETY COMPAG WITH PLASTIC N BRASS 1/4" BSP | OZZLE | | | 5420 | |
|---|----------------|--------------|--------|-------|--|
| PART NUMBER | NOISE LEVEL | FLOW RATE | WEIGHT | PRICE | |
| rP400200000 | - | 345 l/min | 40 g | £7.19 | |



VACUUM BLOW GUNS

ACCESSORIES

PARKAIR[®]

FEATURES / BENEFITS

- Made from nylon 6 abrasive resistant material
- Low air consumption
- · Hand held or static site
- Blow or vacuum

| • | Use | filtered | air @ | 60 - 11 | 5 psi / 1 | 10 mm | bore air-line |
|---|-----|----------|-------|---------|-----------|-------|---------------|

| Ū | | |
|------------------------|---------------------|--------------------------|
| SPECIFICATIONS | LVM 22 | LVM AP 22 |
| CFM @ 60 psi | 9 in / 54 out | 9 in / 54 out |
| CFM @ 100 psi | 14.5 in / 101.5 out | 14.5 in / 101.5 out |
| Air inlet size | 1/4" BSPT male | 1/4" compression fitting |
| Conveying hose ID bore | 32 mm | 32 mm |
| | | |

SAFETY

We recommend that dry filtered compressed air & appropriate safety equipment is used with this product.

For optimum performance, the air feed line should be at least 3/8" ID bore.



VACUUM BLOW GUNS

PART NUMBER

LVMAP22



| PART NUMBER | DESCRIPTION | PRICE |
|-------------|-------------|--------|
| LVM22 | Hand held | £71.15 |





DUST BAG 2700 PART NUMBER DESCRIPTION PRICE I VM22-1 £61.80 Complete with clip **EXTENSION TUBE** 2700 PART NUMBER DESCRIPTION PRICE LVM22-3 £13 58 Extension tube **CREVICE NOZZLE** 2700 PART NUMBER DESCRIPTION PRICE LVM22-5 Crevice nozzle £7.73 **ROUND BRUSH** 2700 PART NUMBER DESCRIPTION PRICE LVM22-6 60 mm diameter £7.91



CEJN Safety Hose Reels

CEJN offers high-quality hose and cable reels with either a CEJN polyurethane hose or a rubber cable. These reels are designed to be easily manoeuvrable and can be mounted on a ceiling or wall. Additionally, they offer an impressive 300-degree range of motion. The exterior housing is robust and serves to protect the hose or cable, as well as the reel mechanism. The feeding action of these reels is smooth and tangle-free, and a stop function can be activated if continuous feeding is not required.

Features / Benefits

- High flow & low pressure dropStrong, slow retraction

- Hose guide
 Soft stop-ball prevents tripping

Specifications


| PART NUMBER | MAX. WORKING PRESSURE | TEMPERATURE RANGE | MEDIA |
|-------------|--------------------------|----------------------|-------|
| C199112082 | 16 bar | -20°C to +60°C | Air |
| C199112182 | 16 bar | -20°C to +60°C | Air |
| C199112020 | 16 bar | -20°C to +60°C | Air |
| C199112022 | 16 bar | -20°C to +60°C | Air |
| C199112120 | 16 bar | -20°C to +60°C | Air |
| C199112130 | 16 bar | -20°C to +60°C | Air |
| C199112132 | 16 bar | -20°C to +60°C | Air |
| C199112140 | 12 bar | -20°C to +60°C | Air |
| C199112040 | 12 bar | -20°C to +60°C | Air |
| C199112150 | 10 bar | -20°C to +60°C | Air |
| | | | |
| C199112088 | 16 bar | -20°C to +60°C | Air |
| C199112168 | 16 bar | -20°C to +60°C | Air |
| C199112028 | 16 bar | -20°C to +60°C | Air |
| C199112128 | 16 bar | -20°C to +60°C | Air |
| C199112138 | 16 bar | -20°C to +60°C | Air |
| | | | |
| C199112230 | 9 bar | 5°C to 60°C | Water |
| C199112240 | 9 bar | 5°C to 60°C | Water |
| | | | |

| PART NUMBER | POWER (FULLY UNWOUND | OUTPUT FULLY WOUND | TEMPERATURE RANGE | MEDIA |
|-------------|-----------------------------|--------------------------|----------------------|----------|
| C199112310 | 2400 W | 1600 W | -10°C to +50°C | Electric |
| C199112311 | 2400 W | 1600 W | -10°C to +50°C | Electric |

Standards











SAFETY HOSE REELS





COMPRESSED AIR HOSE REEL

| - | 320 ESAFE CONNECTION | | 610 | |
|---|----------------------|-----------|--------|---------|
| 1 | PART NUMBER | ID X OD | LENGTH | PRICE |
| | C199112082 | 8 x 12 mm | 10 m | £348.95 |
| | C199112182 | 8 x 12 mm | 17 m | £414.93 |
| | | | | |

1/4" BSPT STANDARD MALE CONNECTION

| C199112020 | 8.0 x 12.0 mm | 7 m | £315.39 |
|------------|---------------|------|---------|
| C199112022 | 8.0 x 12.0 mm | 10 m | £344.44 |
| C199112120 | 8.0 x 12.0 mm | 17 m | £410.42 |
| | | | |

3/8" BSPT STANDARD MALE CONNECTION

| C199112130 | 9.5 x 13.5 mm | 14 m | £417.83 |
|------------|---------------|------|---------|
| | | | |

3/8" BSPT STANDARD ANTI-SPARK CONNECTION

| C199112132 | 9.5 x 13.5 mm | 14 m | £443.64 |
|----------------|---------------|---------|---------|
| 1/2" BSPT STAN | DARD MALE CON | NECTION | |
| | | - | |

| C199112040 | 11 x 16 mm | 5 m | £364.87 |
|------------|------------|------|---------|
| C199112140 | 11 x 16 mm | 10 m | £456.66 |
| C199112150 | 13 x 18 mm | 8 m | £467.24 |
| | | | |

HOSE REELS WITH HI-VIS HOSE





HOSE REEL WITH HI-VIS HOSE

| 320 ESAFE CONNECTION | | | 610 |
|------------------------------------|---------------|--------|---------|
| PART NUMBER | ID X OD | LENGTH | PRICE |
| C199112088 | 8.0 x 12.0 mm | 10 m | £362.27 |
| C199112168 | 9.5 x 13.5 mm | 14 m | £443.68 |
| 1/4" BSPT STANDARD MALE CONNECTION | | | |
| C199112028 | 8.0 x 12 mm | 10 m | £357.81 |
| C199112128 | 8.0 x 12 mm | 17 m | £430.47 |

3/8" BSPT STANDARD MALE CONNECTION

| C199112138 | 9.5 x 13.5 mm | 14 m | £439.17 |
|------------|---------------|------|---------|
| | | | |

WATER HOSE REELS



ELECTRIC HOSE REELS



SAFETY Did you know? Products with safety benefits are indicated by a chevron at the bottom of their table



PRO-SERIES EXTREME AIR / WATER HOSE

FEATURES / BENEFITS

- Auto lock / auto rewind
- Hose layering system
- · Solid brass internal spindle
- High impact touch & durable polypropylene construction with a UV stabilised case
- 180° swivel wall mount bracket
- · Leader hose 2 m with brass fittings

Adjustable hose stop

| SPECIFICATIONS | 15 Series | 20 Series |
|-------------------------|---|------------------|
| Air / water hose | 15 m x 11 mm ID | 20 m x 9.2 mm ID |
| Hose material | Extreme ultraflex reinforced PVC (blue) | |
| Reel / case type | Polypropylene | |
| Weight | 10 kg | |
| Max working pressure | 300 psi (20 bar) | |
| Max working temperature | 40°C / 140°F | |

SERIES 20 WATER HOSE

FEATURES / BENEFITS

- · Auto lock / auto rewind
- Stop anywhere function
- · Controlled hose return
- Adjustable tension control · Adjustable hose stop
- · Hose layering system
- Internal brass fittings
- · Replaceable hose
- High impact weather resistant UV stabilised polypropylene case
- Leader hose 2 m with brass fittings
- Heavy duty mounting bracket with the 180°
- Includes trigger gun (water hose only) NS

| SPECIFICATI | 0 |
|-------------|---|
|-------------|---|

| OI LOII IOATIONO | |
|-------------------------|-----------------------|
| Water hose | 20 m x 11.5 mm |
| Hose material | Heavy duty water hose |
| Reel / case type | Polypropylene |
| Weight | 11.8 kg |
| Max working pressure | 150 psi (10 bar) |
| Max working temperature | 60°C / 140°F |



AIR / WATER HOSE REELS 15 SERIES

| PART NUMBER | HOSE ID | HOSE OD | INLET | OUTLET | PRICE |
|-------------|------------|------------|-------------------------------------|-----------------------------------|---------|
| HR-5840560S | 11 mm | 17 mm | 3/8" BSPP female brass swivel | 3/8" BSPT male brass swivel | £212.50 |
| 20 SERIES | | | | | |
| HR-5820890S | 9.2 mm | 15.2 mm | 1/4" BSPP female brass swivel | 1/4" BSPT male brass swivel | £212.50 |

| OSE | REEL | Y | | 4040 |
|-----|------|------|--|-------|
| | HOSE | HOSE | | PRIOF |

| VAT | ER | но | SE | RE | EL | |
|-----|----|----|----|----|----|--|
| | | | | | | |

ν

| PART NUMB | ER HOSE | HOSE OD | INLET | OUTLET | PRICE |
|------------|--------------|------------|-----------------------------------|-----------------------------------|---------|
| HR-5810450 | s 11.5 mm | 16.5 mm | 3/4" BSPT male brass swivel | 3/4" BSPP tap quick connect | £212.50 |







New

SAFETY



1030

GEN III SERIES

FEATURES / BENEFITS

- Durable yet economical
- · Lightweight & easy to operate
- · Manufactured from tough, corrosion proof, composite materials
- · Heavy duty swivel reduces possible cracking in freezing conditions · Multi position locking mechanism which, when released, provides a complete, positive retraction every time
- · Hotwash reels for use in food preparation & food processing areas
- · Garden hose complee with 2 m side connection hose & inlet fitting
- · Barrier reels are the ideal way to quickly set up personnel safety barriers



| PART NUMBER | HOSE ID | LENGTH | WORKING PRESSURE | PRICE |
|--------------------------------|------------------------------|--------------|---------------------|--------------------|
| RC-AW815-001 | 8 mm / 5/16" | 15 m | 17 bar | £314.13 |
| RC-AW820-001 | 8 mm / 5/16" | 20 m | 17 bar | £331.63 |
| 3/8" CONNECTIO | N | | | |
| | | | | |
| RC-AW1015-001 | 10 mm / 3/8" | 15 m | 17 bar | £340.38 |
| RC-AW1015-001 RC-AW1020-001 | 10 mm / 3/8" 10 mm / 3/8" | 15 m 20 m | 17 bar 17 bar | £340.38 £340.38 |
| | 10 mm / 3/8" | | | |
| RC-AW1020-001 | 10 mm / 3/8" | | | |



Did you know?

Products with safety benefits are indicated by

a chevron at the bottom of their table

| 1,4 CONNECTION | - | | | +030 |
|------------------|--------------|--------|---------------------|---------|
| PART NUMBER | HOSE ID | LENGTH | WORKING PRESSURE | PRICE |
| RC-AW820-001-HV | 8 mm / 5/16" | 20 m | 17 bar | £392.88 |
| 3/8" CONNECTION | | | | |
| RC-AW1020-001-HV | 10 mm / 3/8" | 20 m | 17 bar | £410.38 |
| 1/2" CONNECTION | 1 | | | |
| RC-AW1218-001-HV | 12 mm / 1/2" | 18 m | 17 bar | £427.88 |





| New GARDEN REEL 1/2" CONNECTIO | N | | | 4030 |
|--------------------------------------|--------------|--------|---------------------|---------|
| PART NUMBER | HOSE ID | LENGTH | WORKING PRESSURE | PRICE |
| RC-G1218-001 | 12 mm / 1/2" | 18 m | 10 bar | £349.13 |



SPRING REWIND HOSE REELS



REDASHE WARRANTY





All products supplied by Redashe are warranted from one to 10 years, depending on manufacturer. Hose supplied by Redashe carries the warranty as listed by the manufacturer. A flexible connection must be used between the hose reel & supply. Use of a solid connection will

All warranties cover reel only & exclude any hose supplied

RETRACTA R3 SERIES

REINFORCED PVC HOSE

FEATURES / BENEFITS

- Tough, corrosion free polypropylene construction
- · Supplied with fitted hose for specified application
- · Choice of lockable mounting brackets
- · Virtually maintenance free
- · Lightweight average just 10 kg, easy to install
- · Full automatic hose rewind for neat & tidy storage
- · Low effort, easy-to-use rewind tension




| 16 bar working pressure | | | | | | | |
|-------------------------|--------|-------|---------------|----------------|---------|--|--|
| PART NUMBER | HOSE I | ENGTH | INLET SIZE | HOSE OUTLET | PRICE | | |
| hAR320R | 3/8" | 20 m | 3/8" BSPF | 1/4" BSPM | £497.72 | | |
| hAR415R | 1/2" | 15 m | 3/8" BSPF | 3/8" BSPM | £526.57 | | |

FOR BREATHING AIR

| 12 bar working pressure | | | | | | | |
|-------------------------|------|------|-----------|-----------|---------|--|--|
| hBH100R3 | 3/8" | 15 m | 3/8" BSPF | 3/8" BSPM | £998.68 | | |



PVC HOSE



| r bar working procedure | | | | | | | |
|-------------------------|--------|-------|---------------|----------------|---------|--|--|
| PART NUMBER | HOSE L | ENGTH | INLET SIZE | HOSE OUTLET | PRICE | | |
| hDR418G | 1/2" | 18 m | 3/4" BSPM | 1/2" BSPM | £488.41 | | |
| | | | | | | | |

Supplied with spray gun

REINFORCED RUBBER HOSE



| 10 bar working pressure | | | | | | | |
|-------------------------|------|------|-----------|-----------|---------|--|--|
| hFQ200R3 | 1/2" | 12 m | 1/2" BSPF | 1/2" BSPM | £714.12 | | |



SPRING REWIND HOSE REELS



REELWORKS SERIES

POLYPROPYLENE 60°C MAX

FEATURES / BENEFITS

- · Lightweight & durable, just 5.7 kg
- Constructed in high-impact UV stabilised polypropylene
- Supplied with fitted PVC hose for immediate installation
- · Fully assembled, includes 3 ft connecting hose
- Suitable for compressed air & water
- Integral wall / overhead mounting bracket
- Latching of hose at any length
- Fully automatic hose rewind for neat & tidy storage
- Virtually maintenance free



REEL WITH HOSE

60°C MAXIMUM TEMPERATURE (12 BAR MAX. WORKING PRESSURE

| PART NUMBER | HOSE ID | LENGTH | INLET / OUTLET | PRICE |
|-------------|---------|--------|-------------------|---------|
| hC705100 | 1/4" | 10 m | 1/4" | £167.17 |
| hC705200 | 5/16" | 8 m | 1/4" | £158.74 |

POLYMER HOSE COMPACT

FEATURES / BENEFITS

- Supplied with 15 m x 3/8" or 1/2" flexible, premium hybrid polymer hose
- · Hose has no memory & lays flat when in use
- High quality, durable polypropylene housing
- Fully automatic spring rewind
- Low effort, easy to use, rewind tension
- Integral pivoting wall bracket, swivels through 180°
- Latching of hose at any length
 Latching system can be set to free run if required
- Latching system can be set to free run if require
 Working pressure up to 300 psi (20 bar)
- COMPACT SPRING



REWIND AIR REEL

| PART NUMBER | HOSE ID | LENGTH | INLET / OUTLET | PRICE |
|-------------|---------|--------|-------------------|---------|
| hC2752 | 3/8" | 15 m | 3/8" | £194.59 |
| hC2753 | 1/2" | 15 m | 1/2" | £208.43 |

POLYMER HIGH VISIBILITY HOSE

FEATURES / BENEFITS

- Automatic guide system no bunching of hose, layers hose from side to side, neat & tidy every time
- \bullet Slow retraction system prevents hose from speeding back to the reel if the hose is let go safe operation
- · Low tension spring
- · Latching of hose at any length



FEATURES / BENEFITS

Lightweight & durable, just 10.6 kg
 Constructed in high impact LIV stabilised in

POLYPROPYLENE GARDEN HOSE

- Constructed in high impact UV stabilised polypropylene
 Supplied & fitted with PVC hose for immediate & trouble free installation
- Fully assembled, includes 36" / 0.9 m connecting hose
- Complete with water gun & convenient handle for portable use
- Fitted with speed, control to help automatic hose rewinding constant & at a safe speed keeping it under control at all times
- · Hose layering system ensures neat & trouble free storage of hose
- Spring fully enclosed & lubricated
- · Integral wall / overhead pivoting bracket
- Non-snag rollers reduce hose wear





| PART NUMBER | HOSE CAPACITY | HOSE ID | MAX. WORKING PRESSURE | PRICE |
|-------------|------------------|------------|--------------------------|---------|
| hC2766 | 20 m | 1/2" | 10 bar | £212.36 |

Twelve



HIGH VISIBILITY SAFETY REELS

| PART NUMBER | HOSE CAPACITY | HOSE ID | INLET / OUTLET | PRICE |
|-------------|------------------|---------|-------------------|---------|
| hC2782 | 15 m | 3/8" | 3/8" | £166.13 |
| hC2783 | 15 m | 1/2" | 1/2" | £213.80 |
| | | | | |



REELWORKS SERIES

4000

50 FT

FEATURES / BENEFITS

- Corrosion resistant powder coating
- · Guide arm, adjustable handling, up to 9 positions
- Multi-position ratchet lock



Supplied without hose





| FOR LOW PRES | - | | |
|--------------|-----------------|------------|---------|
| | Black reel with | black hose | |
| | HOSE LENGTH | MAX. | INLET / |

| PART NUMBER | ID | LENGTH | PRESSURE | OUTLET | PRICE | |
|---------------------------------|------|--------|----------|--------|---------|--|
| hC808350L | 3/8" | 15 m | 21 bar | 3/8" | £401.77 | |
| hC808450L | 1/2" | 15 m | 21 bar | 1/2" | £534.38 | |
| FOR MEDIUM PRESSURE AIR / WATER | | | | | | |

| Black reel with black hose | | | | | | | |
|--|------|------|---------|------|---------|--|--|
| hC808350M 3/8" 15 m 155 bar 3/8" £545.86 | | | | | | | |
| Light grey reel with red hose | | | | | | | |
| hC808450M | 1/2" | 15 m | 138 bar | 3/8" | £606.72 | | |

25 FT

FEATURES / BENEFITS

- · Heavy duty steel construction with corrosion resistant powder coating
- · Multi position ratchet lock
- · Spring fully enclosed & lubricated
- 6 1/2" wide L-shaped base ensures stable support
- · Guide arm adjustable for handling up to 9 positions
- · Wall, ceiling or floor mounted

50 - 100 FT

FEATURES / BENEFITS


REEL WITH HOSE

AIR / WATER

Nev

FOR LOW PRESSURE

- · Non-snag roller guides reduce hose wear
- · Latching of hose at any length
- · Corrosion resistant, powder coated finish, black as standard
- · Full flow, internal swivel assembly ensures maximum flow
- Suitable for floor, wall, ceiling or vehicle mount
- · Fully automatic hose rewind for neat & tidy storage



| 4000 |
|------|

| PART NUMBER | HOSE ID | LENGTH | MAX. PRESSURE | INLET / OUTLET | PRICE |
|-------------|------------|--------|------------------|-------------------|---------|
| hC8804100L | 1/2" | 30 m | 21 bar | 1/2" | £890.81 |
| hC880550L | 3/4" | 20 m | 21 bar | 3/4" | £962.81 |
| hC880650L | 1" | 15 m | 21 bar | 1" | £987.37 |

HEAVY DUTY

FEATURES / BENEFITS

- · Constructed in heavy gauge powder coated carbon steel
- · Double arm structure for stability & versatile adjustments
- Slow retraction system prevents hose from speeding back to the reel if the hose is let go - safe operation.
- · Latching hose at any length.
- · Supplied as bare reel, hose available at extra cost (application required)





| PART NUMBER | HOSE ID | LENGTH | MAX. PRESSURE | INLET / OUTLET | PRICE |
|-----------------|------------|--------|------------------|-------------------|---------|
| hCHR826-12-366L | 3/8" | 20 m | 20 bar | 3/8" | £395.25 |
| hCHR826-14-466L | 1/2" | 20 m | 20 bar | 1/2" | £395.25 |

749

4000



SPRING REWIND HOSE REELS



4000

REELWORKS SERIES

HEAVY DUTY – ATEX APPROVED

FEATURES / BENEFITS

- · Constructed in heavy gauge powder coated carbon steel
- Double arm structure for stability & versatile adjustments
 RoHS & REACH compliant
 - ents
- Ex h IIB T4 Gb. Ta = -20°C to +60°C
- Latching of hose at any length
- Supplied as bare reel, hose available at extra cost (application required)
- New **REEL WITHOUT HOSE** FOR LOW PRESSURE AIR / WATER 4000 MAX. INLET / HOSE PART NUMBER LENGTH PRICE PRESSURE OUTLET חו hC213-2520EX 1' 10 bar £1001.67 20 m 1'

FEATURES / BENEFITS

- Constructed in heavy duty 304 stainless steel
- · Double arm structure for stability & versatile adjustments
- BoHS & REACH compliant
- Ex h IIB T4 Gb. Ta = -20° C to $+60^{\circ}$ C
- Latching of hose at any length
- · Supplied as bare reel, hose available at extra cost (application required)



| PART NUMBER | ID ID | LENGTH | MAX. PRESSURE | OUTLET / | PRICE |
|----------------|-------|--------|------------------|----------|----------|
| hC223-2530SSEX | 1" | 30 m | 10 bar | 1" | £1801.63 |

ENCLOSED REEL

FEATURES / BENEFITS

- Suitable for use with air, water
- Corrosion resistant powder coating
- · Compact design for easy installation
- · Spring fully enclosed & lubricated
- · Latching of hose at any length
- · High quality stress free swivel assembly
- Supplied with 1.5 m feeder hose
- Optional swiveling bracket CP-2910



New **REEL WITH HOSE** FOR LOW PRESSURE AIR / WATER 4000 HOSE MAX. INLET / PART NUMBER LENGTH PRICE PRESSURE OUTLET ID hC2910-7153 3/8' 10 m 20 bar 3/8 £331.50 FOR AIR / WATER & OIL

hC2910-8104 1/2" 10 m 160 bar 1/2" £358.40

HEAVY DUTY HAND CRANK REEL

FEATURES / BENEFITS

- Designed for industrial applications where longer lengths of hose are required
- Constructed in heavy gauge powder coated carbon steel
- Wider drum opening (5"/125 mm) making for easier hose installation
- New handle & swivel design for less labour-intensive use (70% more efficient)
- Spring loaded lock pin prevents hose from de-reeling
- · Supplied as bare reel, hose available at extra cost (application required)





| PART NUMBER | HOSE ID | LENGTH | MAX. PRESSURE | INLET / OUTLET | PRICE |
|-------------|------------|--------|------------------|-------------------|---------|
| hCHR11602 | 3/4" | 30 m | 276 bar | 3/4" | £540.60 |

Welve



Redashe

HEAVY DUTY SPRING REWIND REELS

FEATURES / BENEFITS

- · Heavy duty, steel construction with durable, blue powder finish
- Double supported, solid 1" steel axle
- . Multi-position roller arm gives full range of mounting options
- Four direction, non-snag roller guides reduce hose wear
- . 1/4" steel mounting base for maximum stability
- Slotted & drilled mounting holes for easy installation



| 21 bar maximum pressure | | | | | | |
|-------------------------|------------|------------|--------|-------------------|-------|--|
| PART NUMBER | HOSE ID | HOSE OD | LENGTH | INLET / OUTLET | PRICE | |
| hPLPL350AW | 3/8" | 5/8" | 15 m | 3/8" BSPF | POA | |
| hSHL3100AW | 3/8" | 5/8" | 30 m | 3/8" BSPF | POA | |
| hSHL450AW | 1/2" | 7/8" | 15 m | 1/2" BSPF | POA | |
| hSHL4100AW | 1/2" | 7/8" | 30 m | 1/2" BSPF | POA | |
| hSHL550AW | 3/4" | 1 1/8" | 15 m | 3/4" BSPF | POA | |
| hSHL635AW | 1" | 1 7/16" | 10.5 m | 1" NPTF | POA | |

| 2 | |
|-----------------------|--|
| REEL WITH HOSE | |
| FOR DIESEL | |



| 21 bar maximum pressure | | | | | | |
|-------------------------|------|---------|--------|-----------|-----|--|
| hSHL450D | 1/2" | 7/8" | 15 m | 1/2" BSPF | POA | |
| hSHL4100D | 1/2" | 7/8" | 30 m | 1/2" BSPF | POA | |
| hSHL550D | 3/4" | 1 1/8" | 15 m | 3/4" BSPF | POA | |
| hSHL635D | 1" | 1 7/16" | 10.5 m | 1" NPTF | POA | |
| | | | | | | |

FOR FOOD INDUSTRY

| 21 bar maximum pressure | | | | | |
|-------------------------|------|--------|------|-----------|-----|
| hSHL450F | 1/2" | 7/8" | 15 m | 1/2" BSPF | POA |
| hSHL4100F | 1/2" | 7/8" | 30 m | 1/2" BSPF | POA |
| hSHL550F | 3/4" | 1 1/8" | 15 m | 3/4" BSPF | POA |

FOR PRESSURE WASH

| | 21 ba | ar maximu | ım pressu | re | |
|-----------|-------|-----------|-----------|-----------|-----|
| hMPL350P | 3/8" | 5/8" | 15 m | 3/8" BSPF | POA |
| hMPL3100P | 3/8" | 5/8" | 30 m | 3/8" BSPF | POA |

MANUAL REWIND STEEL REELS

FEATURES / BENEFITS

- Designed for industrial applications where longer lengths of hose are required
- · Heavy gauge, powder coated, steel construction
- · Ready for wall, floor or overhead installation
- · Direct crank action, combined with twin bearings, requires minimum rewind effort
- · Spring loaded locking pin prevents drum rotation when in use





REEL WITH HOSE FOR AIR / WATER

| PART NUMBER | HOSE ID | HOSE OD | LENGTH | INLET / OUTLET | PRICE |
|-------------|------------|------------|--------|-------------------|-------|
| h11254100AW | 1/2" | 7/8" | 30 m | 1/2" BSPF | POA |
| h11254200AW | 1/2" | 7/8" | 60 m | 1/2" BSPF | POA |
| h11255100AW | 3/4" | 1 1/4" | 30 m | 3/4" BSPF | POA |

SPRING REWIND CABLE REELS

230 VOLT REEL

FEATURES / BENEFITS

- · Slow retraction system prevents hose from speeding back to the reel if the hose is let go - safe operation
- · Lightweight & durable, from just 7 kg
- Supplied with 15 m of 3 core, 1.5 mm cable
- · Integral wall mounting swivel bracket
- · Latching of cable at any length
- · Fitted circuit breaker
- · Electricity indicator LED light
- . 1.5 m fitted inlet cable
- · Supplied with fitted UK plug & sockets
- · For indoor use only
- · 2 year limited warranty







SPRING REWIND CABLE REFLS



10 VOLT REELS

FEATURES / BENEFITS

- Aluminium construction
- · Latching of cable at any length
- · Fully automatic spring rewind
- . Low effort, easy to use, rewind tension
- Supplied with fitted cable plus standard 16A plug & socket
- · Virtually maintenance free
- · Wall mounted swivel bracket
- IP65 rated

15 M

· Max amperage cable in: 8 amp, cable out: 16 amp



FEATURES / BENEFITS

- · Constructed in high impact UV stabilised polypropylene
- Lightweight design, just 3.5 kg 3.8 kg
- Supplied with fitted H05VV-F cable
- Powder coated, integral wall / ceiling bracket
- · Latching of cable at any length, or a free run option · Manually restorable circuit breaker
- · Fully automatic spring rewind
- . Low effort, easy to use rewind tension
- · Virtually maintenance free
- Supplied with 1.3 m inlet cable, 3 pin UK plug & socket



| PART NUMBER | LENGTH | CORE | MAX VOLTAGE | PRICE |
|--------------|--------|------------|----------------|---------|
| hYZ6185/IP65 | 15 m | 3 x 2.5 mm | 110 V | £859.87 |





| PART NUMBER | LENGTH | CORE | MAX VOLTAGE | PRICE |
|-------------|--------|------------|----------------|---------|
| hYRC100 | 10 m | 3 x 1.5 mm | 240 V | £268.42 |

240 VOLT REEL

FEATURES / BENEFITS

- · Compact, lightweight design
- Supplied with 15 m of 3 core, 1.5 mm cable
- · Fitted inlet cable for connection to supply
- Integral wall mounting swivel bracket
- · Latching of cable at any length
- · Fully automatic spring rewind
- . Low effort, easy to use rewind tension
- Virtually maintenance free

| REEL WITH CABI 3 x 1.5 MM CORE | | | | 4000 |
|-----------------------------------|-----------------|---------|------------------|---------|
| PART NUMBER | CABLE LENGTH | VOLTAGE | AMPS IN / OUT | PRICE |
| hC605100 | 15 m | 240 V | 3 / 10 | £149.26 |

240 VOLT POLYPROPYLENE REEL

FEATURES / BENEFITS

- Lightweight & durable, just 11 kg
- Constructed in high impact UV stabilised polypropylene
- · Supplied with 25 m x 3 core 1.5 mm cable
- · 1.3 mm fitted inlet cable
- · Supplied with fitted pivoting wall bracket
- · Latching of cable at any length
- · Fully automatic spring rewind action
- · Fitted circuit breaker
- · Supplied with fitted UK plug & sockets
- · 12 months' manufacturer's warranty (excluding cable)



AUTOMATIC HOSE REELS



Sicomat Automatic Hose Reels

Sicomat offers a complete line of automatic hose reels that ensure the highest reliability and safety. The hose is rewound automatically to prevent any accidental tripping of the operator.

The wound hose is also kept safe from potential damage caused by trampling or incorrect rewinding, as it can be locked in intermediate positions to reach different workplace areas quickly. Using Sicomat hose reels guarantees a considerable reduction in production downtime, as the operator saves time by no longer having to rewind and arrange hoses, thus improving productivity.



R111 SERIES

| Construction | Steel: galvanised & powder coated |
|---------------|---|
| Suitable for | Air only |
| Weight | 3 kg |
| Supplied with | Swivel bracket & supply polyurethane hose |
| | |



| R111 SERIES 20 BAR WORI | KING PR | ESSURE | | 5420 |
|----------------------------|---------|------------|----------------------|---------|
| PART NUMBER | LENGTH | HOSE ID | INLET / OUTLET | PRICE |
| rR111005008 | 5 m | 8 x 11 mm | Ø8 / 1/4" male BSPT | £194.51 |
| rR111003010 | 3 m | 10 x 14 mm | Ø10 / 3/8" male BSPT | £198.84 |

R532 SERIES

| Construction | 304 stainless steel. Internal spring return |
|---------------|---|
| Suitable for | Air, water / detergents 70°C |
| Weight | 3 kg |
| Supplied with | Swivel bracket & supply polyurethane hose |
| | |



R532 SERIES

| 10 BAR WORKING PRESSURE | | | | | | |
|-------------------------|--------|-----------|---------------------|---------|--|--|
| PART NUMBER | LENGTH | HOSE ID | INLET / OUTLET | PRICE | | |
| rR532005008 | 5 m | 8 x 12 mm | Ø8 / 3/8" male BSPT | £233.45 | | |
| 10 BAR WORKING PRESSURE | | | | | | |
| | | | | | | |

rR532003010 3 m 10 x 14 mm Ø10 / 3/8" male BSPT £264.16

R122 SERIES

| Construction | Steel: galvanised & powder coated internal spring return |
|---------------|--|
| Suitable for | Air only |
| Weight | 6 kg |
| Supplied with | Swivel bracket & supply polyurethane hose |
| Supplied with | Swivel bracket & supply polyurethane hose |



R122 SERIES

| 20 BAR WORKING PRESSURE | | | | |
|-------------------------|-------|------------|----------------------|---------|
| PART NUMBER | PRICE | | | |
| rR122012008 | 12 m | 8 x 12 mm | Ø8 / 1/4" male BSPT | £249.05 |
| rR122010010 | 10 m | 10 x 14 mm | Ø10 / 3/8" male BSPT | £256.50 |

| R533 SERIES | |
|---------------|--|
| Construction | Steel: galvanised & powder coated. Slow retract controlled return |
| Suitable for | Air only |
| Weight | 6 kg |
| Supplied with | Swivel bracket & supply polyurethane hose |

| F | R533 SERIES | | | 1 | |
|---|-------------|---------|------------|----------------------|---------|
| 2 | 20 BAR WORI | KING PR | ESSURE | | 5420 |
| j | PART NUMBER | LENGTH | HOSE ID | INLET / OUTLET | PRICE |
| | rR533015008 | 15 m | 8 x 12 mm | Ø8 / 1/4" male BSPT | £347.76 |
| | rR533012010 | 12 m | 10 x 14 mm | Ø10 / 3/8" male BSPT | £376.04 |



AUTOMATIC HOSE REELS



R222 SERIES

| Construction | Steel: galvanised & powder coated | | | |
|---------------|---|--|--|--|
| Suitable for | Air only | | | |
| Weight | 6 kg | | | |
| Supplied with | Swivel bracket & supply polyurethane hose | | | |



R222 SERIES

| 20 BAR WORKING PRESSURE | | | | |
|-------------------------|--------|------------|----------------------|---------|
| PART NUMBER | LENGTH | HOSE ID | INLET / OUTLET | PRICE |
| rR222015008 | 15 m | 8 x 12 mm | Ø8 / 1/4" male BSPT | £283.56 |
| rR222012010 | 12 m | 10 x 14 mm | Ø10 / 3/8" male BSPT | £326.13 |

| R422 SERIES | |
|---------------|--|
| Construction | Galvanised sheet & powder coated structure |
| Suitable for | Air, water 40°C max. |
| Weight | 20 kg |
| Supplied with | Brackets can be assembled in 3 different positions, supplied with polyurethane hose |



| R422 SERIES |
|-------------------------|
| 19 BAD WORKING DESSLIDE |

| TO BAR WORKING T RESSORE | | | | 5420 |
|--------------------------|--------|------------|-----------------------|---------|
| PART NUMBER | LENGTH | HOSE ID | INLET / OUTLET | PRICE |
| rR422020008 | 20 m | 8 x 14 mm | 3/8" female/male BSPT | £622.77 |
| rR422010010 | 10 m | 10 x 17 mm | 3/8" female/male BSPT | £526.07 |
| rR422015010 | 15 m | 10 x 17 mm | 3/8" female/male BSPT | £585.64 |
| rR422010013 | 10 m | 13 x 20 mm | 1/2" male/male BSPT | £610.80 |
| | | | | |

20 BAR WORKING PRESSURE

rR422025010 25 m 10 x 14 mm 3/8" female/male BSPT £669.46

R523 SERIES

| Construction | Galvanised & powder coated. Internal spring return |
|---------------|--|
| Suitable for | Air, water 40°C max. |
| Weight | 25 kg |
| Supplied with | Flexible polyurethane hose, fixed stand & quick fixing bracket |



R523 SERIES

| 18 BAR WORKING PRESSURE | | | | 5420 |
|-------------------------|--------|------------|----------------|---------|
| PART NUMBER | LENGTH | HOSE ID | INLET / OUTLET | PRICE |
| rR523020013 | 20 m | 13 x 20 mm | 1/2" male BSPT | £839.21 |
| rR523020010 | 20 m | 10 x 17 mm | 3/8" male BSPT | £771.59 |

| R125 SERIES | |
|---------------|---|
| Construction | Powder coated steel, tubular structure with galvanised drum |
| Suitable for | Air only |
| Weight | rR12530008 8.4 kg rR125040008 9.0 kg rR125025010 8.4 kg |
| Supplied with | Easy folding handle & supply polyurethane hose |



R125 SERIES 20 BAR WORKING PRESSURE

| LU BAIL MOIL | | LOODINE | - | 5420 |
|--------------|--------|------------|----------------|---------|
| PART NUMBER | LENGTH | HOSE ID | INLET / OUTLET | PRICE |
| rR125030008 | 30 m | 8 x 12 mm | 1/4" male BSPT | £241.50 |
| rR125040008 | 40 m | 8 x 12 mm | 1/4" male BSPT | £277.73 |
| rR125025010 | 25 m | 10 x 14 mm | 3/8" male BSPT | £255.39 |

| 304 stainless steel |
|---|
| Water |
| 25 kg |
| Flexible hose, revolving stand & quick fixing bracket |
| |



R528 SERIES

70°C MAX. TEMPERATURE 20 BAR WORKING PRESSURE

| PART NUMBER | LENGTH | HOSE ID | INLET / OUTLET | PRICE |
|-------------|--------|------------|----------------|----------|
| rR528020013 | 20 m | 13 x 21 mm | 1/2" male BSPT | £1393.66 |
| rR52815016 | 15 m | 16 x 24 mm | 1/2" male BSPT | £1204.48 |

R529 SERIES

90°C MAX. TEMPERATURE / 10 BAR WORKING PRESSURE

| rR529015016 | 15 m | 16 x 23 mm | 1/2" male BSPT | £1331.27 |
|-------------|------|------------|----------------|----------|
| rR529020013 | 20 m | 13 x 20 mm | 1/2" male BSPT | £1553.65 |

R530 SERIES

| | 150°C MAX. TE | MPERAT | URE / 40 | 00 BAR WORKING I | PRESSURE |
|---|---------------|--------|----------|--------------------|----------|
| 1 | rR530020051 | 20 m | 5/16" | 3/8"F / 3/8"M BSPT | £1541.58 |
| | rR530020038 | 20 m | 3/8" | 3/8"F / 3/8"M BSPT | £1541.58 |

R531 SERIES

150°C MAX. TEMPERATURE / 400 BAR WORKING PRESSURE

| rR531020051 | 20 m | 5/16" | 3/8" female BSPP | £1589.88 |
|-------------|------|-------|------------------|----------|
| rR531020038 | 20 m | 3/8" | 3/8" female BSPP | £1627.11 |



TOOL BALANCERS

PARKAIR[®]

FLEX TYPE A FEATURES

- High impact resistant composite housing
- 7 models selected for a load range from 0 to 3.5 kg
- Adjustable spring load throughout &
- ergonomic handgrip knob
- Adjustable rope stroke
- Available with nylon braided rope or steel
- braided, nylon coated wireTools in conformity with CE directives



FLEX TYPE B FEATURES

- Metal housing
- 14 models selected for a load range from
- 0.5 to 11 kg • Adjustable spring load throughout & safety removable handle
- Adjustable rope stroke
- Available with nylon braided rope or steel
- braided, nylon coated wire
- Tools in conformity with CE directives



FLEX TYPE A NYLON BRAIDED ROPE

| PART NUMBER | LOADING CAPACITY | WEIGHT | CORD LENGTH | PRICE |
|-------------|---------------------|---------|----------------|--------|
| SF0-05 | 0 – 0.5 kg | 0.3 kg | 2.3 m | £73.77 |
| SF05-1 | 0.5 – 1 kg | 0.35 kg | 2.3 m | £73.77 |
| SF1-2 | 1 – 2 kg | 0.4 kg | 2.3 m | £73.77 |
| SF2-35 | 2 – 3.5 kg | 0.4 kg | 2.3 m | £73.77 |

FLEX TYPE B NYLON ROPE

| PART NUMBER | LOADING CAPACITY | WEIGHT | CORD LENGTH | PRICE |
|-------------|---------------------|---------|----------------|--------|
| FLEX05-1 | 0.5 – 1 kg | 0.6 kg | 2.3 m | £75.65 |
| FLEX05-15 | 0.5 – 1.5 kg | 0.6 kg | 2.3 m | £75.65 |
| FLEX1-2 | 1 – 2 kg | 0.65 kg | 2.3 m | £75.65 |
| FLEX2-35 | 2 – 3.5 kg | 0.65 kg | 2.3 m | £75.65 |

STEEL BRAIDED NYLON COATED WIRE

| FLEX05-1A | 0.5 – 1 kg | 0.6 kg | 2.3 m | £80.54 |
|------------|--------------|---------|-------|---------|
| FLEX05-15A | 0.5 - 1.5 kg | 0.6 kg | 2.3 m | £80.54 |
| FLEX1-2A | 1 - 2 kg | 0.65 kg | 2.3 m | £80.54 |
| FLEX2-35A | 2 - 3.5 kg | 0.65 kg | 2.3 m | £80.54 |
| FLEX3-6A | 3 - 6 kg | 1.64 kg | 2.3 m | £122.70 |
| FLEX5-85A | 5 - 8.5 kg | 1.7 kg | 2.3 m | £122.70 |
| FLEX8-11A | 8 - 11 kg | 1.75 kg | 2.3 m | £122.70 |
| | | | | |

FLEX TYPE C FEATURES

- Metal housing
- 10 models selected for a load range from 1 to 70 kg
- Adjustable spring load
- Adjustable rope stroke
- Steel rope

FLEX TYPE C

PART NUMBER

FLEX-3

FLEX-5

FI FX-9

FLEX-15

FLEX-22

FLEX-30

FLEX-40

FLEX-50

FLEX-60

FLEX-70

• Safety device against spring break off



CAPACITY

1 – 3 kg

3 – 5 kg

5 – 9 kg

9 – 15 kg

15 – 22 kg

22 – 30 kg

30 – 40 kg

40 – 50 kg

50 – 60 ka

60 – 70 kg

WEIGHT

1.4 kg

1.5 kg

3.4 kg

3.8 kg

7.2 kg

8.5 kg

9.8 kg

10.4 kg

11.6 kg

11.8 kg



PRICE

£127.96

£127.96

£344.37

£344.37

£508.09

£508.09

£684.98

£684.98

£715.09

£730.14

CORD

I FNGTH

1.5 m

MATIC FEATURES

- Composite housing
- 3 models selected for a load range from 0.5 to 5 kg
- Adjustable spring load
- 6.5 x 10 mm soft braided polyurethane
- hose • Adjustable hose stroke
- Tools in conformity with CE directives

MATIC

| PART NUMBER | LOADING CAPACITY | WEIGHT | CORD LENGTH | PRICE |
|-------------|---------------------|--------|----------------|---------|
| MATIC15 | 0.5 – 1.5 kg | 1.6 kg | 1.6 m | £222.06 |
| MATIC30 | 1.5 – 3.0 kg | 1.7 kg | 1.6 m | £222.06 |
| MATIC50 | 3.0 – 5.0 kg | 1.8 kg | 1.6 m | £222.06 |
| | | | | • |

Matic hose diameter internal: 6.5 mm, external: 10 mm Maximum working pressure: 10 bar



ENERGY SAVING AIR TECHNOLOGY



9

AIR CURTAIN

FEATURES / BENEFITS

- 25:1 air amplification
- Up to 30 dBA noise reduction
- Health & safety compliant
- Low maintenance no moving parts
- Ease of mounting flange running the entire length

APPLICATIONS

- Product drying
- Product cooling
- Swarf contamination removal
 Air saving reduction of energy bills
- Compressor demand reduction
- Noise reduction
- Noise reduction



| NIR CURTAIN | | | 570 |
|-------------|---------|---------------|----------|
| PART NUMBER | LENGTH | THREAD | PRICE |
| AIRM-A85003 | 80 mm | 1 x 1/4" BSPP | £180.40 |
| AIRM-A85004 | 100 mm | 1 x 1/4" BSPP | £246.40 |
| AIRM-A85006 | 150 mm | 1 x 1/4" BSPP | £250.80 |
| AIRM-A85012 | 300 mm | 1 x 1/4" BSPP | £319.00 |
| AIRM-A85018 | 450 mm | 1 x 1/4" BSPP | £389.40 |
| AIRM-A85024 | 600 mm | 2 x 1/4" BSPP | £464.20 |
| AIRM-A85030 | 750 mm | 2 x 1/4" BSPP | £565.40 |
| AIRM-A85031 | 800 mm | 2 x 1/4" BSPP | £633.60 |
| AIRM-A85036 | 900 mm | 2 x 1/4" BSPP | £686.40 |
| AIRM-A85048 | 1200 mm | 4 x 1/4" BSPP | £957.00 |
| AIRM-A85055 | 1400 mm | 4 x 1/4" BSPP | £1093.40 |
| AIRM-A85071 | 1800 mm | 6 x 1/4" BSPP | £1592.80 |

* * *

AIR AMPLIFIER

| | | Inlet Air | | | | Ai | r Cons | umptic | on | | | | | Sou | nd Lev | vel* | |
|----------------------------|------------------|-----------|-----|-----|-----|-----|--------|--------|-----|-------|-----|-----|-----|-----|--------|------|-----|
| Product Code | Outlet | Pressure | | | cfm | | | | | l/min | | | | | dBA | | |
| Product Code | Diameter (mm) | psi | 20 | 40 | 60 | 80 | 100 | 20 | 40 | 60 | 80 | 100 | 20 | 40 | 60 | 80 | 100 |
| | (1111) | Bar | 1.4 | 2.7 | 4.1 | 5.4 | 6.8 | 1.4 | 2.7 | 4.1 | 5.4 | 6.8 | 1.4 | 2.7 | 4.1 | 5.4 | 6.8 |
| AIRM-A15005 | 18 | | 4 | 8 | 10 | 13 | 15 | 113 | 227 | 283 | 368 | 425 | 70 | 75 | 82 | 83 | 86 |
| AIRM-A15008 & AIRM-A100008 | 32 | | 8 | 11 | 13 | 15 | 17 | 227 | 311 | 368 | 425 | 481 | 59 | 73 | 76 | 79 | 83 |
| AIRM-A15006 | 37 | | 9 | 14 | 19 | 23 | 27 | 255 | 396 | 538 | 651 | 765 | 66 | 77 | 82 | 83 | 86 |
| AIRM-A15015 & AIRM-A10015 | 51 | | 13 | 18 | 22 | 25 | 28 | 368 | 510 | 623 | 708 | 793 | 59 | 69 | 75 | 78 | 83 |
| AIRM-A15030 & AIRM-A10030 | 100 | | 15 | 21 | 26 | 30 | 34 | 425 | 595 | 736 | 850 | 963 | 59 | 68 | 73 | 75 | 78 |

AIR AMPLIFIER

AIRM-A10030

HIGH THRUST JET

MALE THREAD

ALUMINIUM

FEATURES / BENEFITS

• 4 to 25:1 air amplification - can cut compressed air demand by 70%

- Up to 30 dBA noise reduction
- Health & safety compliant
- Low maintenance no moving parts
- Application specific set-up (no shims) fully adjustable
- APPLICATIONS
- · Product redirection
- Product drying
- Air saving reduction of energy bills
- Compressor demand reduction
 Noise reduction
- Product cooling
- Blowing & vacuum applications





1/2" BSPP

POA

| PART NUMBER | OUTLET DIA | THREAD | PRICE | | |
|-----------------|------------|-----------|---------|--|--|
| AIRM-A15005 | 18 mm | M5 x 6 mm | £167.20 | | |
| AIRM-A15006 | 37 mm | G1 x 6 mm | £206.80 | | |
| AIRM-A15008 | 32 mm | 1/4" BSPP | £169.40 | | |
| AIRM-A15015 | 51 mm | 3/8" BSPP | £222.20 | | |
| AIRM-A15030 | 100 mm | 1/2" BSPP | £620.40 | | |
| STAINLESS STEEL | | | | | |
| AIRM-A10008 | 32 mm | 1/4" BSPP | £451.00 | | |
| AIRM-A10015 | 51 mm | 3/8" BSPP | £508.20 | | |

100 mm

HIGH THRUST JET

FEATURES / BENEFITS

- 4 to 6:1 air amplification
- Up to 30 dBA noise reduction
- Health & Safety compliant
- · Low maintenance no moving parts
- Application specific set-up
- · Cuts compressed air usage

APPLICATIONS

- Air saving reduction of energy bills
- Compressor demand reduction
- Noise reduction
- Swarf removal
- Material conveying
- Product drying
- Product cooling



| STAINLESS STEE | ËL (| | 5700 |
|----------------|------------|-----------|---------|
| PART NUMBER | OUTLET DIA | THREAD | PRICE |
| AIRM-A38038-SS | 13 mm | 1/8" BSPT | £112.20 |
| AIRM-A38044-SS | 13 mm* | 1/8" BSPT | £112.20 |
| | | | |

* In-line high thrust jet

Welve





SAFETY BLOW GUN

DESCRIPTION

Meech energy saving nozzles & blow guns direct compressed air over a curved surface on the outside of the nozzle. This action entrains the ambient air & amplifies the total air flow. Meech nozzles & blow guns can save up to 70% of compressed air demand, whilst significantly reducing noise levels. They have hundreds of applications & will significantly reduce running costs

FEATURES / BENEFITS APPLICATIONS

- 25:1 air amplification
- · Air saving reduction of energy • Up to 30 dBA noise reduction
- · Health & safety compliant
- hills · Compressor demand reduction
- · Low maintenance no moving parts
- Swarf removal Any blow gun task
- Application specific set-up
- · Operator comfort ergonomic lightweight aluminium handle

| SPF | CIF | CAT | ONS | |
|-----|-----|-----|-----|--|

| SPECIFICATIONS | | |
|--------------------|------------------|-------------|
| Inlet air pressure | Air consumption | Sound level |
| 20 psi (1.4 bar) | 5 CFM (142 lpm) | 65 dBA |
| 40 psi (2.7 bar) | 9 CFM (255 lpm) | 71 dBA |
| 60 psi (4.1 bar) | 12 CFM (340 lpm) | 76 dBA |
| 80 psi (5.4 bar) | 15 CFM (425 lpm) | 79 dBA |
| 100 psi (6.8 bar) | 18 CFM (510 lpm) | 81 dBA |
| | | |



| ALUMINIUM NOZZLE | | | | | | |
|------------------|-----------|--------|--|--|--|--|
| AIRM-A45400 | 1/4" BSPP | £46.20 | | | | |
| | | | | | | |

ENERGY SAVING SAFETY NOZZLE

| FEATURES / BENEFITS | | APPLICATIONS | | | |
|--|------|---|-------------|--|--|
| 25:1 air amplification Up to 30 dBA noise reduction Health & Safety compliant Low maintenance – no moving parts Application specific set-up Fits two thread types | | Air saving – reduction of energy bills Compressor demand reduction Noise reduction Parts ejection Swarf removal Cooling of parts | | | |
| SPECIFICATIONS | | | | | |
| Inlet air pressure | Air | consumption | Sound level | | |
| 20 psi (1.4 bar) | 5 (| CFM (142 lpm) | 65 dBA | | |
| 40 psi (2.7 bar) | 9 (| CFM (255 lpm) | 71 dBA | | |
| 60 psi (4.1 bar) | 12 (| CFM (340 lpm) | 76 dBA | | |
| 80 psi (5.4 bar) | 15 (| CFM (425 lpm) | 79 dBA | | |
| 100 psi (6.8 bar) | 18 (| CFM (510 lpm) | 81 dBA | | |
| | | æ | | | |

ADJUSTABLE SAFETY NOZZLE

PACK OF 5 MALE THREAD

STAINLESS STEEL

| 01/11/2200 01/22 | | - 0100 | | | |
|------------------|-----------|---------|--|--|--|
| PART NUMBER | THREAD | PRICE | | | |
| AIRM-A40009-1/8 | 1/8" BSPP | £246.40 | | | |
| AIRM-A40009-1/4 | 1/4" BSPP | £246.40 | | | |
| ALUMINIUM | | | | | |
| AIRM-A48009-1/8 | 1/8" BSPP | £112.20 | | | |
| AIRM-A48009-1/4 | 1/4" BSPP | £112.20 | | | |

COLDSTREAM AIR GUN

DESCRIPTION

Coldstream air guns, from Meech, use compressed air to provide a cold air source commonly used for spot cooling. Available in adjustable & nonadjustable versions with a choice of knuckle trunking. The Coldstream air gun is capable of achieving temperatures that are over 40°C below the compressed air temperature.

FEATURES / BENEFITS

- Available in two sizes
- · Up to 30 dBA noise reduction
- · Health & safety compliant
- · Low maintenance no moving parts
- · Application specific set-up supplied with 4 generators
- · Easy to install secure in place with a strong magnet

APPLICATIONS

- · Ultrasonic weld cooling
- Spot cooling
- · Component cooling Tool cooling





Single

ADJUSTABLE AIR GUN

| PART NUMBER AIRM-A60015A AIRM-A60015AY NON-ADJUSTABI | SIZE 280 mm x 54 mm 280 mm x 54 mm | OUTLET Single Double | PRICE £479.60 £488.40 |
|---|--|----------------------------|-----------------------------|
| AIRM-A60015 | 280 mm x 54 mm | Single | £451.00 |
| AIRM-A60015Y | 280 mm x 54 mm | Double | £468.60 |

229 mm x 45 mm

NEEDLE COOLER

AIRM-A60008

DESCRIPTION

5700

AI AI

Needle coolers, from Meech, use compressed air to provide a cold air source. Combining a small vortex tube, hot-end silencer & flexible knuckle trunking that direct the cold air flow to the target. Typically used to cool sewing needles, a magnetic mounting bracket means the cooler can be fixed to virtually any metal surface. The needle cooler is capable of providing a cold air source up to 50°C below the compressed air temperature.

FEATURES / BENEFITS

- · Stainless steel construction hard wearing
- · Low maintenance no moving parts
- · Suitable for harsh environments
- · Easy direction of cold airflow
- · Quick & easy mounting magnetic base



£475.20

| RT NUMBER | SIZE | OUTLET | PRICE |
|------------|----------------|--------|---------|
| IRM-A20503 | 148 mm x 45 mm | Single | £338.80 |
| IRM-A20504 | 148 mm x 45 mm | Double | £358.60 |
| | | | |



ENERGY SAVING AIR TECHNOLOGY




CABINET COOLER

DESCRIPTION

Meech air technology stainless steel cabinet cooler systems provide a cold air source to stop cabinets overheating & prevent ingress of contamination, such as dust or moisture. When compared to fans that are commonly found in cabinets, Meech cabinet cooling systems provide the ideal cooling solution.

FEATURES / BENEFITS

- · Alternative to traditional AC units
- · Up to 30 dBA noise reduction
- Health & Safety compliant
- Low maintenance no moving parts
- · Application specific set-up
- · Easy to install
- · Prevents dust entering the cabinet
- APPLICATIONS
- Industrial PC cooling
- CCTV cooling
- · Cooling equipment on marine vessels
- Machine panel cooling
- · Cooling LCD touch screens



| AIRM-A70325-24 | 24 V solenoid & thermostat | £792.00 |
|-----------------|-----------------------------|---------|
| AIRM-A70325-240 | 240 V solenoid & thermostat | £792.00 |
| AIRM-A70325-110 | 110 V solenoid & thermostat | £792.00 |
| | | |

VORTEX TUBE

DESCRIPTION

Meech air technology stainless steel vortex tubes convert compressed air into two airflows, one extremely cold & the other extremely hot. Vortex tubes have no moving parts & can produce a drop in temperature up to 50°C below the compressed air temperature, whilst hot air can be up to 50°C above compressed air temperature.

FEATURES / BENEFITS

- Cold air to 50°C below compressed air temperature
- · Hot air to 50°C above compressed air temperature
- · Hard wearing manufactured from stainless steel
- · Maintenance free no moving parts
- · Accurate temperature control

APPLICATIONS

- Spot cooling
- · Weld cooling
- · Plastic slitting Product cooling
- · Foodstuffs cooling





| AIRM-A20010 | 10 CFM | Refrig H | £336.60 |
|-------------|--------|----------|---------|
| AIRM-A21010 | 10 CFM | Cold L | £336.60 |
| AIRM-A20015 | 15 CFM | Refrig H | £336.60 |
| AIRM-A21015 | 15 CFM | Cold L | £336.60 |
| AIRM-A20025 | 25 CFM | Refrig H | £336.60 |
| AIRM-A21025 | 25 CFM | Cold L | £336.60 |
| AIRM-A20035 | 35 CFM | Refrig H | £336.60 |
| AIRM-A21035 | 35 CFM | Cold L | £336.60 |

EXPERIMENTAL KITS

DESCRIPTION

The Meech experimental kit incorporates a Meech vortex tube with a cold end silencer & a length of flexible knuckle trunking, which can be used to direct the air flow. The experimental kit also includes all 8 generators, that allows for the most flexible temperature & air consumption, perfect for applications that require changing cold air temperature.

FEATURES / BENEFITS

- · Low maintenance no moving parts
- · Suitable for a range of applications
- · No electricity costs
- Available in 2 sizes
- · Runs only on compressed air
- · Stainless steel construction hard wearing
- · Provided with full range of generators (temperature control)





SMALL

MEDIUM

QUATTROFLEX PROFESSIONAL GARDEN HOSE

FEATURES / BENEFITS

- Extreme pressure resistant & stable, no deformation
- · Kink resistant with thick wall & very strong 24-ply reinforcement
- · Best quality polymer materials, for long-term & heavy-duty use
- · Plasticisers are cadmium, barium, lead & bisphenol-A free
- RAU-PVC 7589, RAU-PVC 8389 & RAU-PVC 6798 does not contain any SVHC >0.1% in accordance with the ECHA candidate list or attachment XIV. of the REACH Regulation (EC) no. 1907/2006
- RAU-PVC 7589, RAU-PVC 8389 & RAU-PVC 6798 complies with the electrical & electronic equipment Directive 2011/65/EU, including the addition Directive 2015/863/EU
- RAU-PVC 7589, RAU-PVC 8389 & RAU-PVC 6798 are phthalate-free according to entries 51 & 52 of the annex XVII. of the REACH Regulation (EC) no. 1907/2006 & free from polycyclic aromatic hydrocarbons according to GS specification AfPS GS 2014:01 PAK & Regulation (EU) no. 1272/2013

APPLICATIONS

- · Professional garden hose
- Very suitable for use on reels

| New QUATTROFLEX O | | DSE | C abble - Press | |
|----------------------|----|-----|-----------------|---------|
| PART NUMBER | mm | ins | L bar | PRICE |
| REH10092411025 | 13 | 1/2 | 50 | £76.71 |
| REH10092421025 | 15 | 5/8 | 40 | £105.68 |
| REH10092431025 | 19 | 3/4 | 35 | £129.33 |
| REH10092441025 | 25 | 1 | 30 | £216.23 |
| 30 METRE COILS | | | | |
| REH10092411030 | 13 | 1/2 | 50 | £92.12 |
| 50 METRE COILS | | | | |
| REH10092411050 | 13 | 1/2 | 50 | £153.42 |
| REH10092421050 | 15 | 5/8 | 40 | £211.36 |
| REH10092431050 | 19 | 3/4 | 35 | £239.17 |
| REH10092441050 | 25 | 1 | 30 | £397.02 |
| 100 METRE COIL | S | | | |
| REH10092411100 | 13 | 1/2 | 50 | £307.02 |
| REH10092431100 | 19 | 3/4 | 35 | £469.48 |
| REH10092441100 | 25 | 1 | 30 | £864.74 |

🗘 REHAU

GREEN LINE GARDEN HOSE

FEATURES / BENEFITS

- 18-fibre diagonal reinforcement: pressure & deformation resistance
- Flexibility & temperature resistance (-20 °C to +60 °C)
- · Easy to handle
- For medium-duty use
- Use of phthalate free plasticisers
- Bisphenol-A free
- SVHC free (highly problematic substances) compliant with REACH directive (EC) no. 1907/2006
- PAH free compliant with GS specification AfPS GS 2014:01 PAH & directive (EU) no. 1272/2013
- No heavy metals & brominated flame retardants compliant with RoHS directive 2011/65/EU, & no plasticisers compliant with delegated directive 2015/863

APPLICATIONS

Hobby sector

- · Private households
- · Ideal in connection with a hose reel



CONTENTS

- 20 m, 13 mm (1/2") Green Line garden hose
- 1 x tap connector
- 1 x quick hose connector
- 1 x waterstop connector
- 1 x adjustable spray nozzle





GARDEN EQUIPMENT




ALL ROUND FITTINGS

ALLROUND FITTINGS

Fittings to connect hoses, compatible with all commercially available polymer systems. Dimensions for 13 mm (1/2") also suitable for connecting 15 mm (5/8") hoses.






COMFORT FITTINGS

COMFORT FITTINGS

Fittings to connect hoses, with soft grip inlays and recessed handles, compatible with all commercially available push-fit systems.



| | | GARDEN E | | [◯] REHAU | |
|---|--|--------------------|---|-------------------------------|-------------------|
| New MULTI PATTERN S 7 PATTERN | SPRAY GUN | 1366 | New MULTI PATTERN SPR 8 PATTERN | AY GUN | 1366 |
| PART NUMBER REH14824021100 | DESCRIPTION 7 pattern multi spray gun | PRICE £21.17 | PART NUMBER REH14720021100 | DESCRIPTION Thumb operated | PRICE £28.65 |
| New | | | New 5 WAY ADJUSTABLE | | |
| SPRAY NOZZLE | And the second s | 1366 | WITH GROUND SPIKE | E 🔰 🖓 | 1366 |
| PART NUMBER | DESCRIPTION Fully adjustable from fine mist to full j | PRICE | WITH GROUND SPIKE PART NUMBER REH14830421100 | DESCRIPTION 5 way | 1366 PRICE £14.28 |
| PART NUMBER REH14824321200 CONTENTS • Automatic hose reel • Hose burst pressure • 35 m hose complete • 2 m connecting hose | Fully adjustable from fine mist to full j containing 1/2" quality garden hose 30 bar @ 20°C ly assembled e with fittings g to the wall (dowels, screws, wall bra | PRICE iet £5.46 | PART NUMBER | DESCRIPTION 5 way | PRICE |
| PART NUMBER REH14824321200 CONTENTS • Automatic hose reel • Hose burst pressure • 35 m hose complete • 2 m connecting hose • Accessories for fixin | Fully adjustable from fine mist to full j containing 1/2" quality garden hose 30 bar @ 20°C by assembled e with fittings g to the wall (dowels, screws, wall bra- ctions | PRICE iet £5.46 | CONTENTS · 3/4" tap connector with n · Quick hose connector · Waterstop connector | DESCRIPTION 5 way | PRICE |
| PART NUMBER REH14824321200 CONTENTS • Automatic hose reel • Hose burst pressure • 35 m hose complete • 2 m connecting hose • Accessories for fixin • Detailed user instruct | Fully adjustable from fine mist to full j containing 1/2" quality garden hose 30 bar @ 20°C by assembled e with fittings g to the wall (dowels, screws, wall bra- ctions | PRICE jet £5.46 | PART NUMBER REH14830421100 • 3/4" tap connector with n • Quick hose connector • Waterstop connector • Spray nozzle | DESCRIPTION 5 way | PRICE £14.28 |

DESCRIPTION

- The handle & stand in the Allround hose holder are made of painted
- Steel, & side panels are made of polymer
 Suitable for the transport of 50 m 13 mm (1/2") or 25 m 19 mm (3/4") hoses*
- Contents: hose holder including 2 tap connectors & 2 quick hose connectors for a 13 mm (1/2") hose
- * This specification depends on the hose diameter; variations are possible



DESCRIPTION

- · Comfort metal hose cart
- Supplied complete with 30 m of 1/2" Slide Line hose & 1.5 m connection set for connection to the tap & a shower with suitable connection fittings
 Hose cart is delivered assembled; hose & fittings are mounted



| PART NUMBER | DESCRIPTION | PRICE |
|----------------|---------------|---------|
| REH14510221330 | Hose cart set | £286.69 |

1366